


VOLANO TERMICO PDC

BUFFER TANK FOR HEAT PUMP

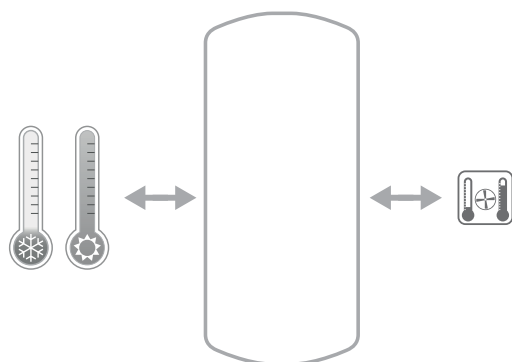

See TECHNICAL SUPPORT chapter
for example of installation

PRESSURE	TEMPERATURE
Pmax 4 bar	Tmax -10 / +95 °C



TECHNICAL DESCRIPTION

Buffer either for hot or cold water provided by heat pump, in order to limit the generator on/off switchings.

MATERIAL

Mild steel.

EXTERNAL LINING

Grey PVC.

INSULATION

High thermal insulation with ecological polyurethane hard foam.

WARRANTY

2 years-See general sales conditions and warranty.

VOLANO TERMICO PDC

ENERGY
EFFICIENCY
CLASS

MILD STEEL BUFFER TANK
(suitable for heat pump)

Model Art. Nr.

100	3001162311001
200	3001162311002
300	3001162311003
500	3001162311004



C
C
C
C

VOLANO TERMICO PDC

ENERGY
EFFICIENCY
CLASS


MILD STEEL BUFFER TANK
(suitable for heat pump)

Model Art. Nr.

500	3001162311014
-----	---------------



B

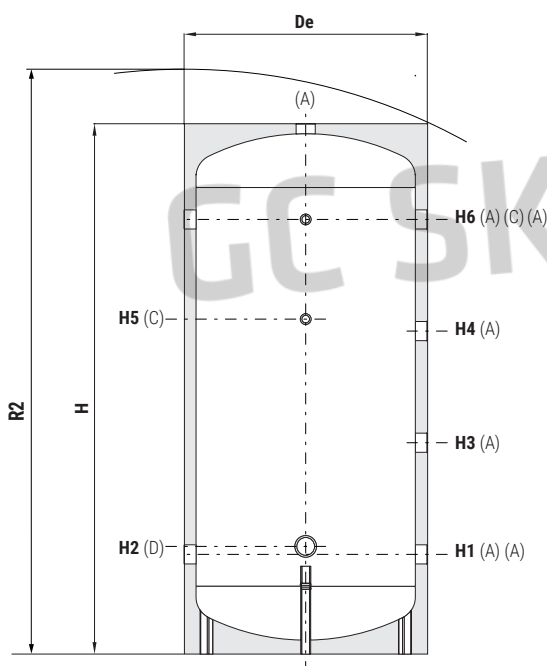


A To the System

C Connection for instrumentation 1/2" F

D Connection for electric immersion heater 1" 1/2 F



cordivari.com/erp



On line ErP label tool



CORDIVARI Lab

TÜV Rheinland Energie und Umwelt GmbH states that test procedures and Cordivari LAB are certified conforming to European standard EN 15332, as indicated by Ecodesign ErP Directive.



Model	Weight [Kg]	Volume [lt]	De	H	R2	H1 [mm]	H2	H3	H4	H5	H6	A
												Connections F
100	23	95	461	990	1100	206	246	374	543	511	711	1"
200	41	180	517	1289	1395	206	246	489	793	836	1086	1"
300	51	280	624	1346	1490	256	276	536	816	846	1096	1"1/4
500	76	478	750	1641	1810	271	291	634	998	1091	1361	1"1/4

Model	Weight [Kg]	Volume [lt]	De	H	R2	H1 [mm]	H2	H3	H4	H5	H6	A
												Connections F
500 (B)	76	478	750	1641	1810	271	291	634	998	1091	1361	1"1/4

