



OBCHOD-VTP.CZ
voda – topení – plyn

Kulový kohout FF


Art: 1300

Materiál:

páčka:	ocel
tělo:	niklovaná mosaz
osička:	HPb57-3
koule:	HPb57-3
„o“ kroužek:	NBR
utahovací matka:	HPb57-3
tesnění:	PTFE
max.pracovní teplota:	120°C
max. pracovní tlak:	30 bar
použití:	studená a teplá voda, nafta, olej



Technický výkres

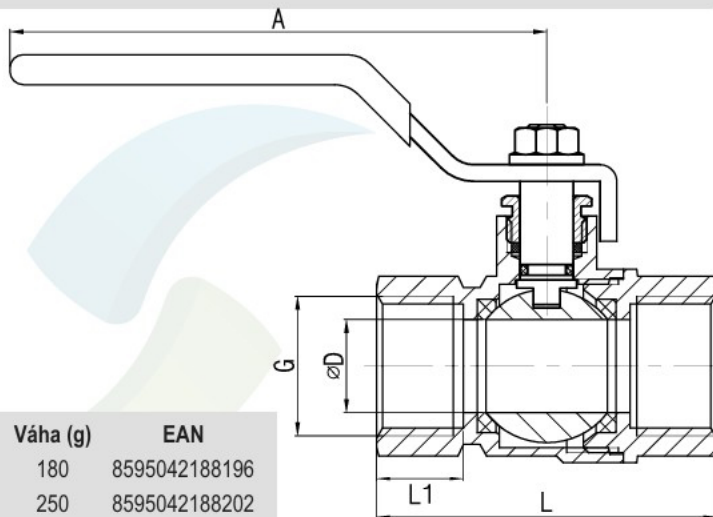

Rp	L	L1	G	ØD	A	Váha (g)	EAN
1/2"	51	13	1/2"	14	95	180	8595042188196
3/4"	57	13	3/4"	18	95	250	8595042188202
1"	67	15	1"	23	125	405	8595042130140
5/4"	77	16	5/4"	31	132	630	8595042130157
6/4"	88	16,5	6/4"	38	142	950	8595042130164
2"	99	16,5	2"	47	154	1367	8595042130171
2 1/2"	118	22	2 1/2"	57	220	2250	8595042130188
3"	142	24	3"	69	220	3495	8595042130195
4"	165	30	4"	85	255	5350	8595042130201

záruka 5 Let
Intrastat 84818081



Datum: 1. 5. 2025